


# FMC880

EASY INSTALLATION WATERPROOF TRACKER  
WITH 4G LTE CAT1 CONNECTIVITY

4G FUTURE-PROOF  
NETWORK SUPPORT

U-TYPE  
CABLE

RELIABLE CONNECTION  
BETWEEN DEVICES

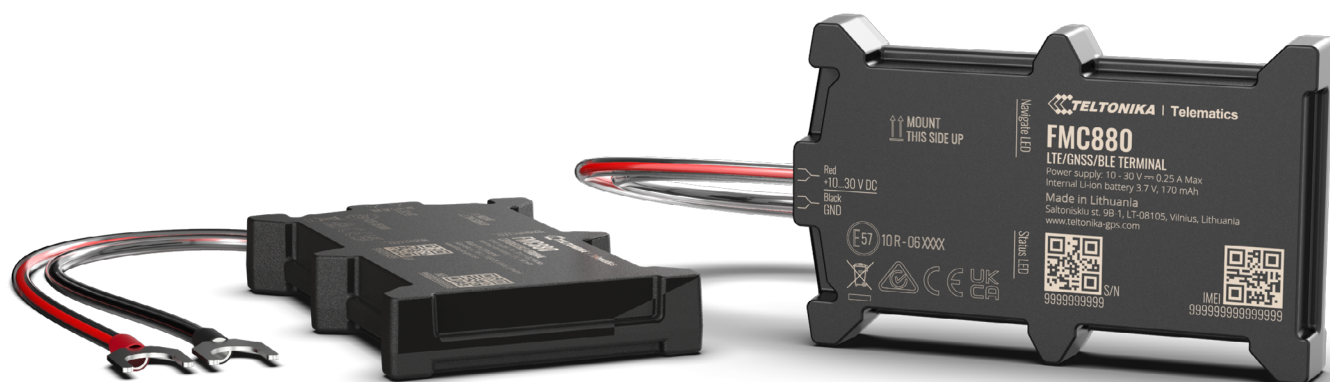

## IMPROVED GNSS TRACKING ACCURACY

Standalone L1 and L5 dual-band GNSS receiver ensures better track quality and quick time to first fix.

## CLAMP CONNECTORS

Allows installing tracker in a few minutes

## BLUETOOTH 4.0

Bluetooth for external devices and Low Energy sensors

## CRASH DETECTION

Crash detection functionality working according accelerometer data



LIGHT VEHICLES



MOTORBIKES



INSURANCE  
TELEMATICS




COURIER DELIVERY  
SERVICES



RENTAL AND  
LEASING

FMx8 series devices are EASY to use and FAST to install. The number "8" brings everything together in one place and stands out with its simplicity of basic tracking. Teltonika FMC880 tracker is waterproof device with 4G LTE Cat 1 and Bluetooth connectivity. An extremely fast and easy installation allows connecting device in a few minutes! No specific knowledge or engineers are required for installation. This vehicle GPS trackers has a higher IP65 rating and a slim design which is essential for under-bonnet installation.

Thanks to that, FMC880 tracker perfectly suits for light vehicle tracking in applications like courier delivery service, car rental & leasing, insurance telematics and many other industries, where simple integration is a must. It is a perfect solution for real time monitoring, specially for beginners and those, who are looking for new opportunities to expand their businesses. FMC880 device has a built-in accelerometer, which provides accurate crash trace data. This tracker also supports various Bluetooth Low Energy sensors, beacons, firmware and configuration update via Bluetooth. All of that increase the number of possible use scenarios in any market. It is quick to install, easy to use and ready to start tracking in minutes!

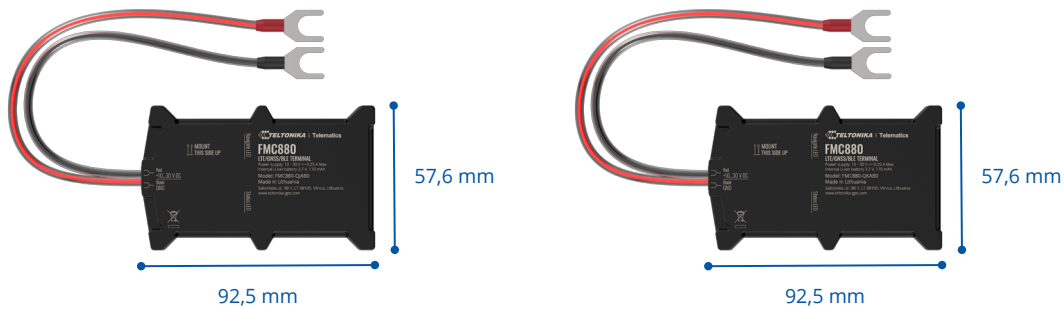

**Product**

Model name	FMC880-QJAB0	FMC880-QKAB0
------------	--------------	--------------

**Module**

Name	Quectel EG915U-EU with AG3335	Quectel EG915U-LA with AG3335
Technology	LTE CAT 1/GSM/GPRS/GNSS/BLUETOOTH	LTE CAT 1/GSM/GPRS/GNSS/BLUETOOTH

**GNSS\***

GNSS	L1: GPS, GLONASS, GALILEO, BEIDOU, SBAS*, QZSS* L5: GPS, GALILEO, BEIDOU	L1: GPS, GLONASS, GALILEO, BEIDOU, SBAS*, QZSS* L5: GPS, GALILEO, BEIDOU
Receiver	L1: 75 channel L5: 60 channel	L1: 75 channel L5: 60 channel
Tracking sensitivity	-165 dBm	-165 dBm
Position accuracy	< 1.5 m CEP	< 1.5 m CEP
Velocity accuracy	< 0.1 m/s (within +/- 15% error)	< 0.1 m/s (within +/- 15% error)
Hot start	< 1 s	< 1 s
Warm start	< 24 s	< 24 s
Cold start	< 35 s	< 35 s

\*Optional modes available with custom firmware applications, for more information contact your sales manager

**Cellular**

2G bands	GSM: B2/B3/B5/B8	GSM: B2/B3/B5/B8
4G bands	LTE FDD (CAT 1): B1/B3/B5/B7/B8/B20/B28	LTE FDD (CAT 1): B2/B3/B4/B5/B7/B8/B28/B66
Data transfer	LTE FDD (CAT 1): Max. 10 Mbps (DL) / Max. 5 Mbps (UL) GSM (GPRS): Max. 85.6 Kbps (DL) / Max. 85.6 Kbps (UL)	LTE FDD (CAT 1): Max. 10 Mbps (DL) / Max. 5 Mbps (UL) GSM (GPRS): Max. 85.6 Kbps (DL) / Max. 85.6 Kbps (UL)
Transmit power	Class 5 for GSM850/900: 30±5dBm Class 3 for GSM1800/1900: 29±5dBm Class 3 for LTE-FDD: 26±5dBm Bluetooth: 5.54±2dBm Bluetooth LE: -4.26±2dBm	Class 5 for GSM850/900: 30±5dBm Class 3 for GSM1800/1900: 29±5dBm Class 3 for LTE-FDD: 26±5dBm Bluetooth: 5.54±2dBm Bluetooth LE: -4.26±2dBm
Data support	SMS (TEXT, PDU), Network protocols (TCP, UDP, TLS, EGTS, MQTT)	SMS (TEXT, PDU), Network protocols (TCP, UDP, TLS, EGTS, MQTT)

**Power**

Input voltage range	10 - 30 V DC with overvoltage protection	10 - 30 V DC with overvoltage protection
Internal Back-up battery	170 mAh Li-Ion battery 3.7 V	170 mAh Li-Ion battery 3.7 V
Internal fuse	3 A, 125 V	3 A, 125 V

**Bluetooth**

Specification	4.0 + LE	4.0 + LE
Supported peripherals	Temperature and Humidity sensor, OBDII dongle, Inateck Barcode Scanner, Universal BLE sensors support	Temperature and Humidity sensor, OBDII dongle, Inateck Barcode Scanner, Universal BLE sensors support

**Physical specification**

Dimensions	92.5 x 57.6 x 14 mm (L x W x H)	92.5 x 57.6 x 14 mm (L x W x H)
Weight	63 g	63 g

**Operating environment**

Operating temperature (without battery)	-40 °C to +85°C	-40 °C to +85 °C
Storage temperature (without battery)	-40 °C to +85 °C	-40 °C to +85 °C
Operating temperature (with battery)	0 °C to +40 °C	-0 °C to +40 °C
Storage temperature (with battery)	-20 °C to +45 °C	-20 °C to +45 °C
Operating humidity	5% to 95% non-condensing	5% to 95% non-condensing
Ingress Protection Rating	IP65	IP65
Battery charge temperature	0 °C to +45 °C	0 °C to +45 °C
Battery discharge temperature	-20 °C to +60 °C	-20 °C to +60 °C
Battery storage temperature	-20 °C to +45 °C for 1 month -20 °C to +35 °C for 6 months	-20 °C to +45 °C for 1 month -20 °C to +35 °C for 6 months

**Interface**

GNSS antenna	Internal High Gain	Internal High Gain
GSM antenna	Internal High Gain	Internal High Gain
USB	2.0 USB Micro B	2.0 USB Micro B
LED indication	2 status LED lights	2 status LED lights
SIM	Micro-SIM	Micro-SIM
Memory	128MB internal flash memory	128MB internal flash memory

**Features**

Sensors	Accelerometer	Accelerometer
Scenarios	Green Driving, Over Speeding detection, Jamming detection, GNSS Fuel Counter, Excessive Idling detection, Unplug detection, Towing detection, Crash detection, Auto Geofence, Manual Geofence, Trip	Green Driving, Over Speeding detection, Jamming detection, GNSS Fuel Counter, Excessive Idling detection, Unplug detection, Towing detection, Crash detection, Auto Geofence, Manual Geofence, Trip
Sleep modes	GPS Sleep, Online Deep Sleep, Deep Sleep, Ultra Deep Sleep	GPS Sleep, Online Deep Sleep, Deep Sleep, Ultra Deep Sleep

Configuration and firmware update	FOTA Web, Teltonika Configurator (USB, Bluetooth)	FOTA Web, Teltonika Configurator (USB, Bluetooth)
SMS	Configuration, Events, Debug	Configuration, Events, Debug
GPRS commands	Configuration, Debug	Configuration, Debug
Time Synchronization	GNSS, NITZ, NTP	GNSS, NITZ, NTP
Ignition detection	Accelerometer, External Power Voltage	Accelerometer, External Power Voltage

### Certification & Approvals

Regulatory	CE/RED, E-Mark, RCM, REACH, RoHS
------------	----------------------------------